

Solar Motion Sensor Light - QSE-PL48-20



Solar Powered



3.7V/2000mAh
Lithium Battery




Adjustable
Color Temperature

- 6000k
- 5450k
- 4900k
- 4350k
- 3800k
- 3250k
- 2700k

Outdoor Solar LED lights provide excellent illumination with long battery life, remote-controlled operation, flexible installation options and elegant design. Best in class motion sensor enabled security light for your patio, fence, deck, yard, pathway, etc.

- Unique 48LED Light Design - generating 450 lumens of brightness with 24 warm-light LEDs and 24 cool-white LEDs.
- Remote Control with adjustable 7 gears color temperature, switch freely from warm-white light to cool-white light.
- 3 Optional Modes - Auto on highlight at dusk to dawn and switch to auto-induction model after 3 hours; Highlight when motion sensed, lunar/off when people go away after 15 seconds.
- 2 Ways to Install - Directly install the motion sensor light on the wall OR extend a pole to stall.
- High-impact ABS/PC and IP65 waterproof rated design make the light withstand all kinds of extreme weather conditions.
- Solar-powered and PIR Motion sensor design allow for greater energy saving.

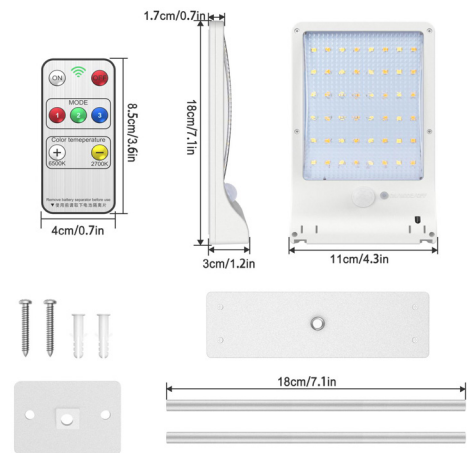

specification

LED Chips	SMD 2835, 48pcs	Wattage	5 Watts
Battery	Lithium -3.7V/2000mAh	Installation Type	Wall Mount
Solar Panel	2.2W/5.5V/400mA	Lighting Mode	PIR Motion Sensor
Housing Material	Original ABS + PC	Color	Black/White
Luminous Flux	450lm	Lighting Area	40m ²
Color Temperature	2700k - 6000k	Detecting Angle	120°
Motion Sensor Range	3 - 5m	Power Source	Solar
Light Direction	Downlight	Design Lifespan	12 Years
Included Components	Solar Sensor Light, Remote Control, Anchor & Screws, Pole, Metal Board, User Guide		

Modes 3 in 1

1. Lunar Brightness Light + Motion Sensor Full Brightness Light When in dark night, the light will keep lunar brightness without people coming near, however become full bright if people comes.
2. Off + Motion Sensor Full Brightness Light (Recommend), when darkness falls, the light will keep dark without people coming near, however become full bright if people comes.
3. Full Brightness Light When darkness falls, and auto switch to mode 2 after 3 hours.

QSE-AL79-20